

HERRINGBONE GLUEDOWN


Technical data sheet

Glued down vinyl panels with micro bevel for classic herringbone pattern

panel dimensions: **2,5 x 135 x 620 mm**


box: 26 pieces (=2,1762 m² / 10,7 kg)

palette: 84 boxes (=182,8008 m² / 933 kg)

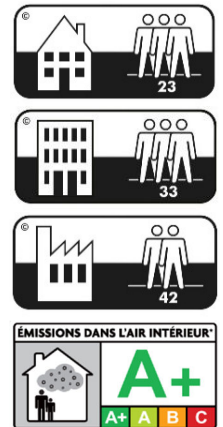

Test results		
Overall thickness (with underlay)	EN ISO 24346	2,5mm ± 0.15mm
Wearlayer thickness	EN ISO 24340	0.5mm ± 0.05mm
Squareness	EN 434	<0.3mm
Dimensional stability	EN ISO 24342	≤0.01%
Peeling strength	EN 431	>70N/50mm
Residual Indentation	EN ISO 24343-1	≤0.1mm
Castor Chair	ISO 4918	After 25000 cycles, no visible damage
Slip resistance	EN 13893	Class DS
Fire resistance	EN 13501-1	B _{fl} -S ₁
Abrasion resistance	EN 660	Group T
Stain & chemical resistance	EN ISO 26987	Class 0
Cigarette Burn test	EN ISO 1399	Class 4
Color fastness	ISO 105-B02	Grade 6
Formaldehyde emission	EN 717-3	E1
Usage classification	EN ISO 10582	23 / 33 / 42
Underfloor heating	EN ISO 12524	Compatible, max. 27°C
Thermal conductivity	EN 12664:2001	0,060 W/(m•K)
Thermal resistance	EN 12664:2001	0,041 (m ² •K)/W
Impact insulation class	ASTM E989-18	IIC 52
Impact sound reduction	ISO 717-2	5dB
CE	EN14041:2004+AC:2006	
VOC	A+	

Construction of HERRINGBONE GLUEDOWN panel

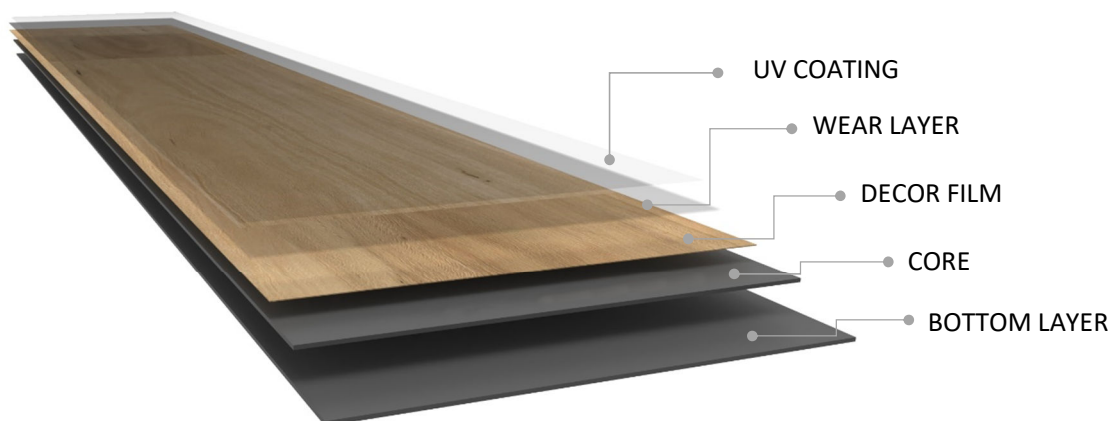

gluedown



wear layer
0.50 mm



wood grain
structure



water proof



easy to clean



floor heating



animal proof



child proof



eco-friendly



EN 14041:2004+AC:2006

